

APPENDIX B

*Estimated "Worst Case" Distances that Should be Maintained from
Single Cellular, PCS, and Paging Base Station Antennas*

Table B1-1. Estimated "worst case" horizontal* distances that should be maintained from a single, omni-directional, cellular base-station antenna to meet FCC RF exposure guidelines


Effective Radiated Power (watts) per channel based on maximum total of 96 channels per antenna	Effective Isotropic Radiated Power (watts) per channel based on a maximum total of 96 channels per antenna	Horizontal* distance (feet) that should be maintained from a single omni-directional cellular antenna
0.5	0.82	3.4
1	1.6	4.8
5	8.2	10.8
10	16.4	15.2
25	41	24.1
50	82	34.1
100	164	48.2

*For intermediate values not shown on this table, please refer to the Figure B1-1

*These distances are based on exposure at same level as the antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These estimates are worst case, assuming an omnidirectional antenna using 96 channels. If the systems are using fewer channels, the actual horizontal distances that must be maintained will be less. Cellular omnidirectional antennas transmit more or less equally from the antenna in all horizontal directions and transmit relatively little energy directly toward the ground. Therefore, these distances are even more conservative for "non-horizontal" distances, for example, distances directly below an antenna.


Figure B1-1. Estimated "worst case" horizontal* distances that should be maintained from a single omni-directional cellular base station antenna to meet FCC RF exposure guidelines

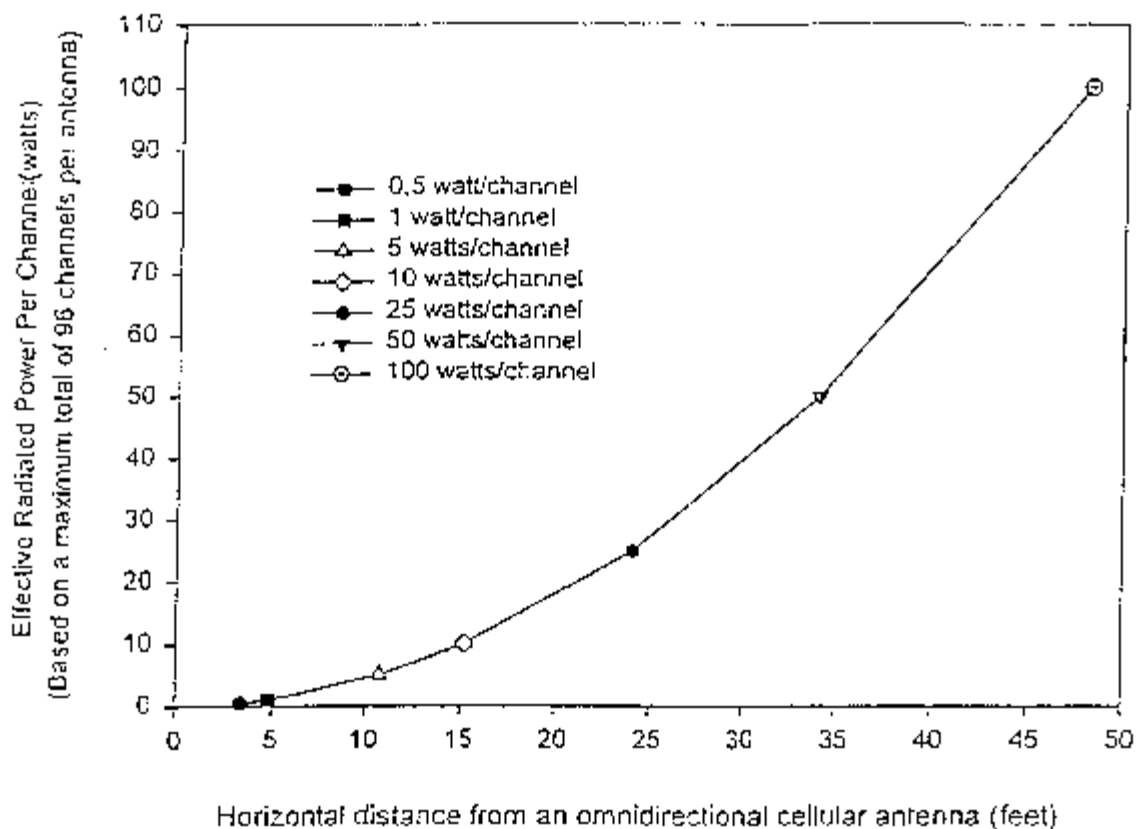

* These distances are based on exposure at same level as antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These estimates are worst case, assuming an omnidirectional antenna using 96 channels. If the systems are using fewer channels, the actual horizontal distances that must be maintained will be less. Cellular omnidirectional antennas transmit more or less equally from the antenna in all horizontal directions and transmit relatively little energy directly toward the ground.

Figure B1-2. Estimated "worst case" horizontal* distances that should be maintained from a single sectorized, cellular base station antenna to meet FCC RF exposure guidelines

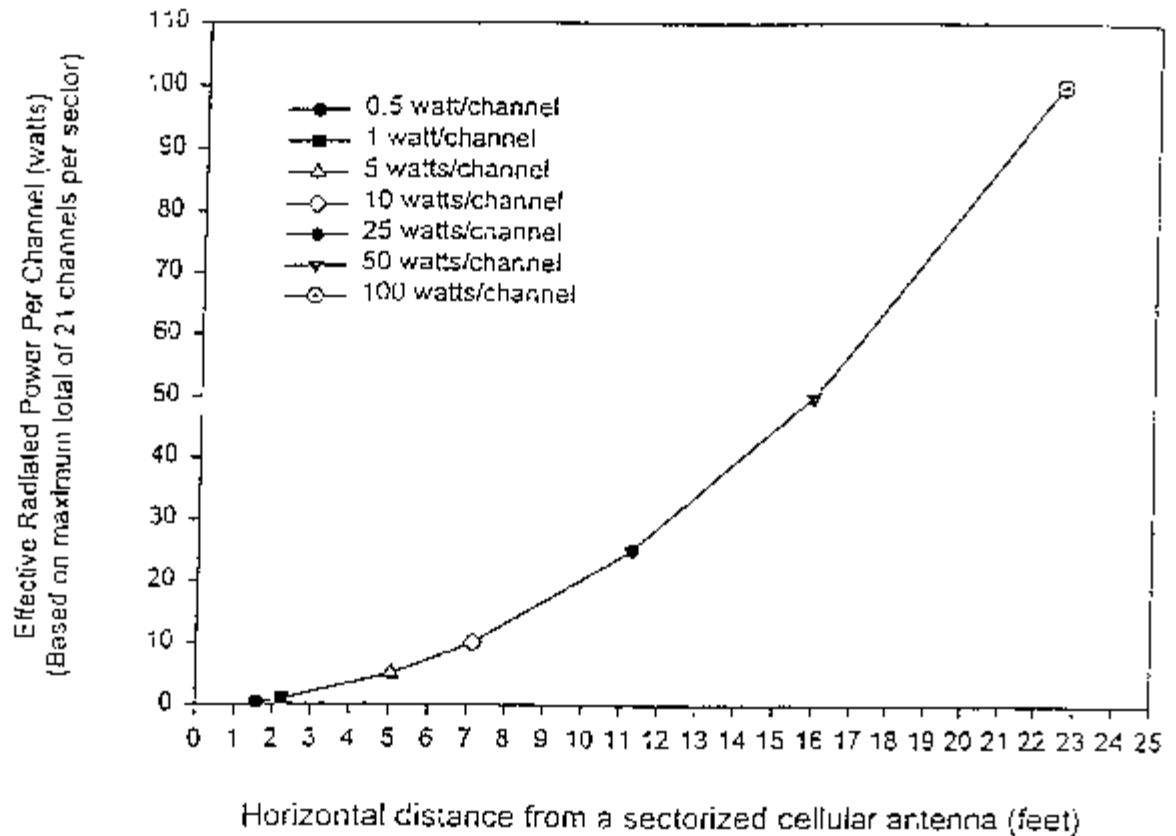

* These distances are based on exposure at same level as antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These estimates are "worst case", assuming a sectorized antenna using 21 channels. If the systems are using fewer channels, the actual horizontal distances that must be maintained will be less. Cellular sectorized antennas transmit more or less in one direction from the antenna in a horizontal direction and transmit relatively little energy directly toward the ground.

Table B1-2. Estimated "worst case" horizontal* distances that should be maintained from a single, sectorized, cellular base-station antenna to meet FCC RF exposure guidelines

Effective Radiated Power (watts) per channel based on maximum total of 21 channels per sector	Effective Isotropic Radiated Power (watts) per channel based on maximum total of 21 channels per sector	Horizontal* distance (feet) that should be maintained from a single sectorized cellular antenna
0.5	0.82	1.6
1	1.6	2.3
5	8.2	5
10	16.4	7.1
25	41	11.3
50	82	16
100	164	22.6

For intermediate values not shown on this table, please refer to the Figure B1-2

*These distances are based on exposure at same level as the antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These estimates are "worst case," assuming a sectorized antenna using 21 channels. If the systems are using fewer channels, the actual horizontal distances that must be maintained will be less. Cellular sectorized antennas transmit more or less in one direction from the antenna in a horizontal direction and transmit relatively little energy directly toward the ground. Therefore, these distances are even more conservative for "non-horizontal" distances, for example, distances directly below an antenna

Table B1-3. Estimated "worst case" horizontal* distances that should be maintained from a single sectorized Broadband PCS base station antenna to meet FCC RF exposure guidelines


Effective Radiated Power (watts) per channel based on maximum total of 21 channels per sector	Effective Isotropic Radiated Power (watts) per channel based on maximum total of 21 channels per sector	Horizontal* distance (feet) that should be maintained from a single sectorized Broadband PCS antenna
0.5	0.82	1.2
1	1.6	1.7
5	8.2	3.8
10	16.4	5.4
25	41	8.6
50	82	12.1
100	164	17.2

For intermediate values not shown on this table, please refer to the Figure B1-3

*These distances are based on exposure at same level as the antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These estimates are "worst case," assuming a sectorized antenna using 21 channels. If the system is using fewer than 21 channels, the actual horizontal distances that must be maintained will be less. PCS sectorized antennas transmit more or less in one direction from the antenna in a horizontal direction and transmit relatively little energy directly toward the ground. Therefore, these distances are even more conservative for "non-horizontal" distances, for example, distances directly below an antenna.

Figure B1-3. Estimated "worst case" horizontal* distances that should be maintained from a single sectorized, PCS base station antenna to meet FCC RF exposure guidelines

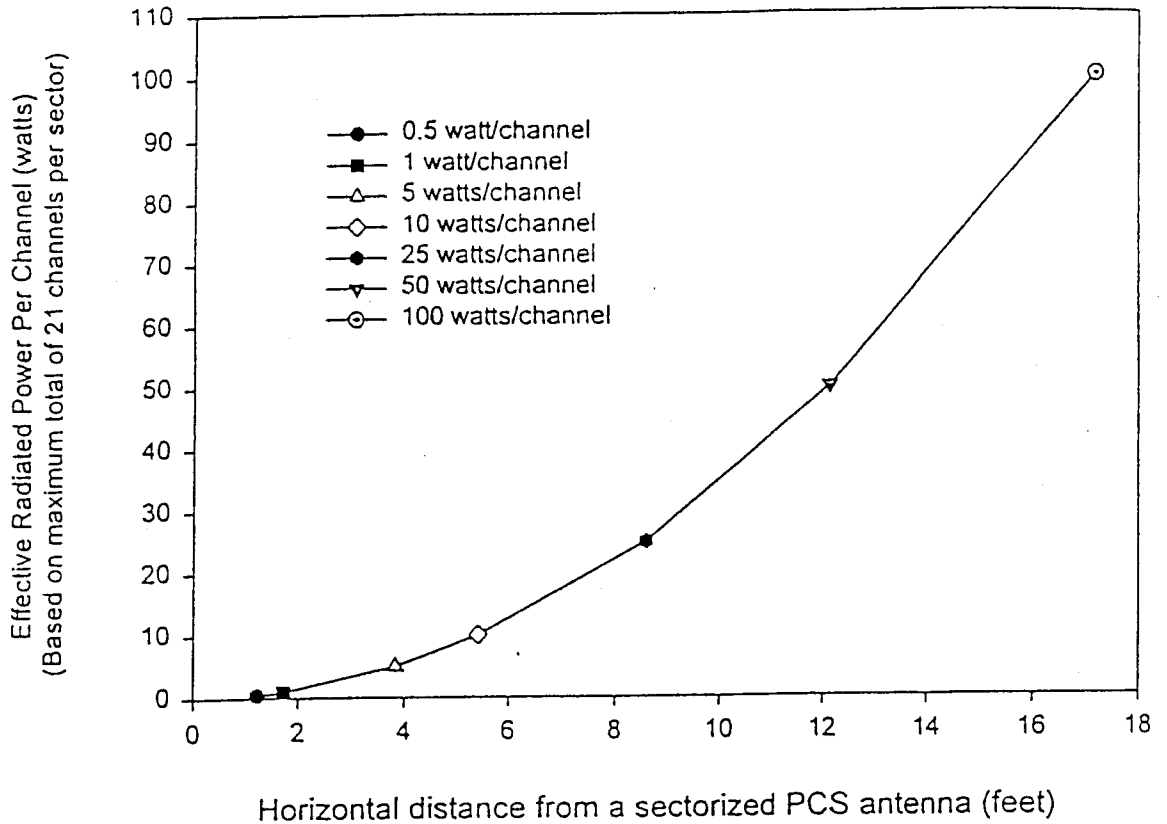

* These distances are based on exposure at same level as antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These estimates are "worst case", assuming a sectorized antenna using 21 channels. If the systems are using fewer channels, the actual horizontal distances that must be maintained will be less. PCS sectorized antennas transmit more or less in one direction from the antenna in a horizontal direction and transmit relatively little energy directly toward the ground.

Table B1-4. Estimated "worst case" horizontal* distances that should be maintained from a single omnidirectional paging or narrowband PCS antenna to meet FCC RF exposure guidelines. Note: this table and the associated figure only apply to the 900-940 MHz band; paging antennas at other frequencies are subject to different values.


Effective Radiated Power (watts) based on one channel per antenna	Effective Isotropic Radiated Power (watts)	Horizontal* distance (feet) that should be maintained from a single omnidirectional paging or narrowband PCS antenna
50	82	3.4
100	164	4.8
250	410	7.5
500	820	10.6
1,000	1,640	15.1
2,000	3,280	21.3
3,500	5,740	28.2

For intermediate values not shown on this table, please refer to the Figure B1-4

*These distances are based on exposure at same level as the antenna, for example, on a rooftop or in a building directly across from and at the same height as the antenna.

Note: These distances assume only one frequency (channel) per antenna. Distances would be greater if more than one channel is used per antenna. Omnidirectional paging and narrowband PCS antennas transmit more or less equally from the antenna in all horizontal directions and transmit relatively little energy toward the ground. Therefore, these distances are even more conservative for "non-horizontal" distances, for example, distances directly below an antenna.

Figure B1-4. Estimated "worst case" horizontal* distances that should be maintained from a single omnidirectional paging or narrowband PCS antenna to meet FCC RF exposure guidelines.
 Note: this figure and the associated table only apply to the 900-940 MHz band; paging antennas at other frequencies are subject to different values

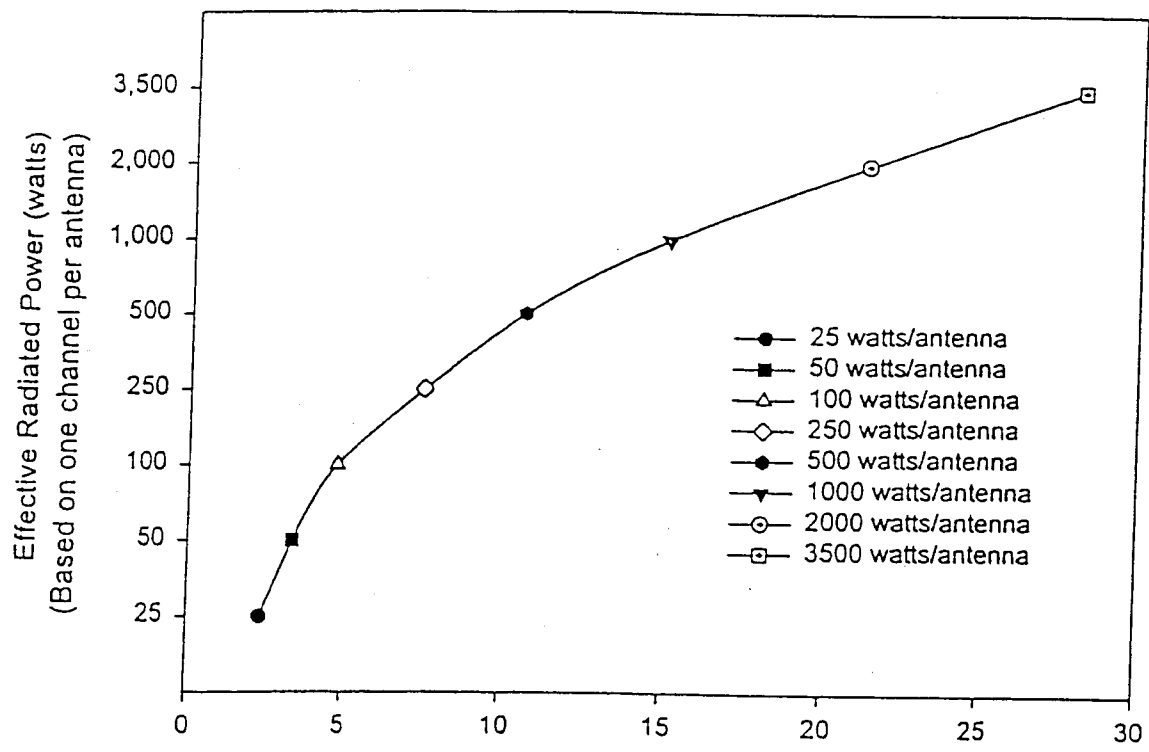

Horizontal distance from an omnidirectional paging or narrowband PCS antenna (feet)

* These distances are based on exposure at the same level as the antenna, for example, on a rooftop or building directly across from and at the same height as the antenna.

Note: These distances assume only one frequency (channel) per antenna. Distances would be greater if more than one channel is used per antenna. Omnidirectional paging and narrowband PCS antennas transmit more or less equally from the antenna in all horizontal directions and transmit relatively little energy towards the ground.